

## MBR10 Series Schottky Barrier Rectifiers


### Features

- High efficiency operation
- Low power loss
- Low stored charge majority carrier conduction
- High forward surge capability
- Lead free in compliance with EU RoHS
- 2011/65/EU directive
- Green molding compound as per IEC61249
- Std..(Halogen Free)


### Mechanical Data

- Circuit figure: Single positive
- Leads: Solderable per mil-std-202, Method 208
- Polarity: as marked
- Mounting torque: 5 in-lbs maximum
- Terminals: Puretin plated
- Weight: TO-220AC 1.80 grams  
ITO-220AC 1.65 grams  
TO-262AC 1.45 grams  
TO-263(D<sup>2</sup>PAK) 1.35 grams

#### Package outline

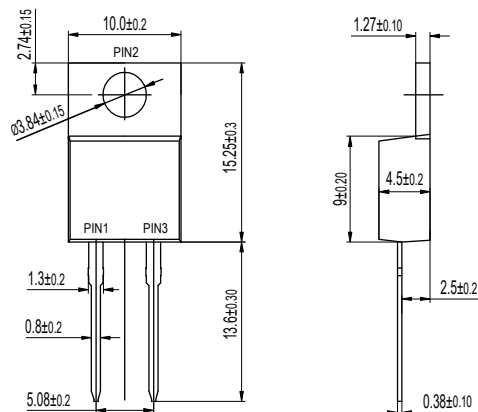


TO-220AC  
MBR10XX

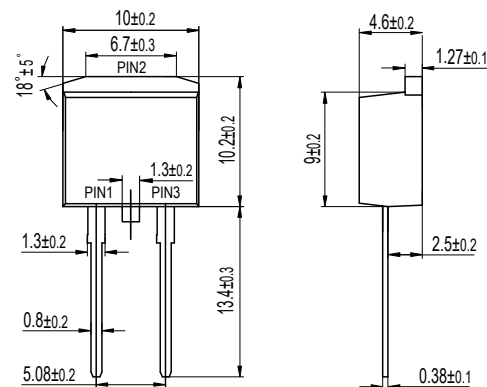


TO-262AC  
MBR10XXW


#### Dimensions in millimeters

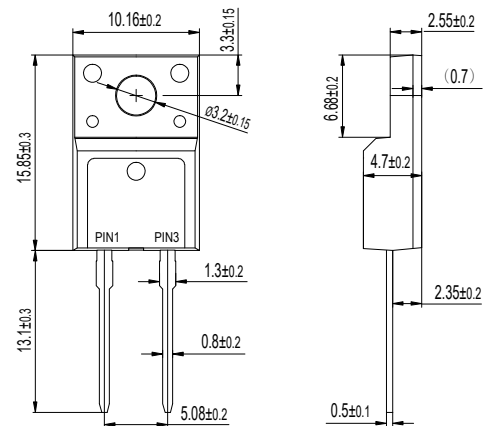

ITO-220AC  
MBR10XXF

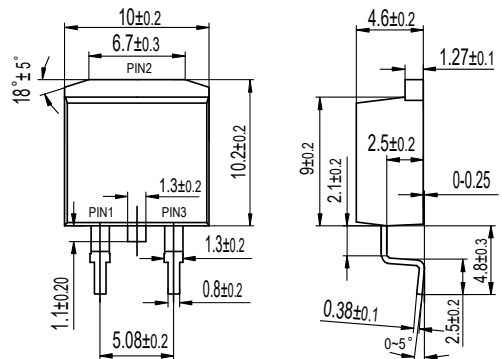

TO-263(D<sup>2</sup>PAK)  
MBR10XXD



**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS(TA=25°C)**

| RATINGS                                                                                    | SYMBOL | MBR<br>1040<br>1040F<br>1040W<br>1040D | MBR<br>1045<br>1045F<br>1045W<br>1045D | MBR<br>1060<br>1060F<br>1060W<br>1060D | MBR<br>10100<br>10100F<br>10100W<br>10100D | MBR<br>10150<br>10150F<br>10150W<br>10150D | MBR<br>10200<br>10200F<br>10200W<br>10200D | UNIT |
|--------------------------------------------------------------------------------------------|--------|----------------------------------------|----------------------------------------|----------------------------------------|--------------------------------------------|--------------------------------------------|--------------------------------------------|------|
| Maximum repetitive reverse voltage                                                         | VRRM   | 40                                     | 45                                     | 60                                     | 100                                        | 150                                        | 200                                        | V    |
| Maximum RMS voltage                                                                        | VRMS   | 28                                     | 32                                     | 42                                     | 70                                         | 105                                        | 140                                        | V    |
| Maximum DC blocking voltage                                                                | VDC    | 40                                     | 45                                     | 60                                     | 100                                        | 150                                        | 200                                        | V    |
| Maximum average forward current                                                            | IAV    | 10                                     |                                        |                                        |                                            |                                            |                                            | A    |
| Peak forward surge current, 8.3ms single half sine- wave superimposed on rated load        | IFSM   | 125                                    |                                        |                                        |                                            |                                            |                                            | A    |
| Typical thermal resistance (Note 1)<br>TO-220AB<br>ITO-220AB<br>TO-262AB<br>TO-263(D2 PAK) | Rθ-JC  | 2.0<br>4.5<br>2.5<br>2.5               |                                        |                                        |                                            |                                            |                                            | °C/W |
| Operating junction temperature range                                                       | TJ     | -55 to +150                            |                                        |                                        |                                            | -55 to +175                                |                                            | °C   |
| Storage temperature range                                                                  | TSTG   | -55 to +175                            |                                        |                                        |                                            |                                            |                                            | °C   |
| CHARACTERISTICS                                                                            | SYMBOL | MBR<br>1040<br>1040F<br>1040W<br>1040D | MBR<br>1045<br>1045F<br>1045W<br>1045D | MBR<br>1060<br>1060F<br>1060W<br>1060D | MBR<br>10100<br>10100F<br>10100W<br>10100D | MBR<br>10150<br>10150F<br>10150W<br>10150D | MBR<br>10200<br>10200F<br>10200W<br>10200D | UNIT |
| Maximum forward voltage per leg at IF=10A                                                  | VF     | 0.65                                   |                                        | 0.75                                   | 0.85                                       | 0.92                                       |                                            | V    |
| Maximum average reverse current at rated DC blocking voltage<br>TJ=25°C<br>TJ=125°C        | IR     | 0.10<br>15                             |                                        |                                        | 0.01<br>5                                  |                                            |                                            | mA   |

Notes: 1. Thermal resistance from junction to case.

FIG. 1 - TYPICAL FORWARD CURRENT DERATING CURVE

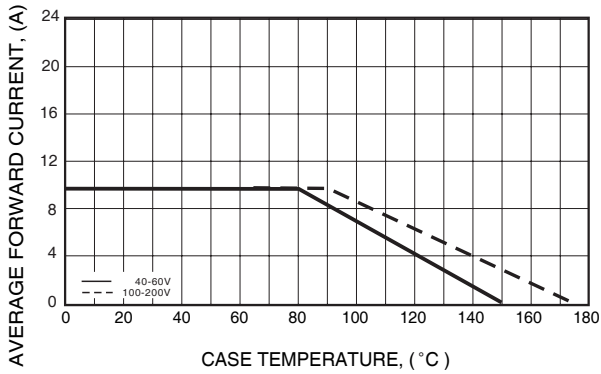


FIG. 2 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

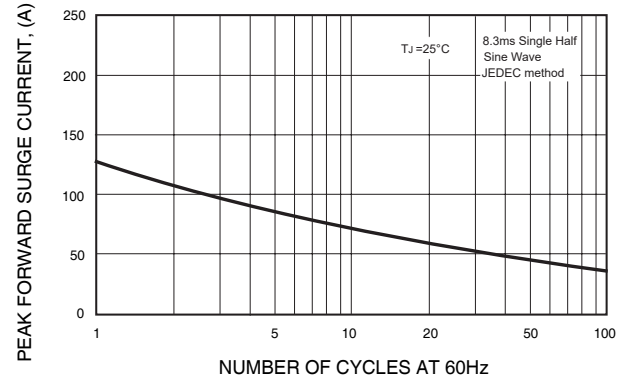


FIG. 3 - TYPICAL REVERSE CHARACTERISTICS

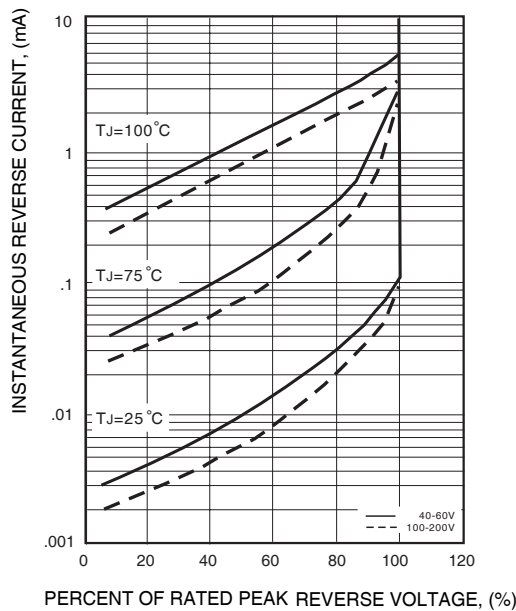


FIG. 4 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

